

ハイパーインデックス174DAS SPコート (略号: H7DP)

仕様

材質	超高屈折率プラスチックレンズ
基準径	マイナス(Φ75・Φ70・Φ65)
屈折率	1.74
比重	1.47
アッベ数	33
コート	ハイパービジョンコート + SPコート(超撥水コート)
視感透過率	98%
紫外線	UV400加工
設計	両面非球面設計


特殊加工(有料)

染色	アリアーテレス (下記カラー濃度は染色不可) フェア***/グロウ***/トゥルー***/ブリーズ*** それぞれ50F、50G、50/20の濃度 コパー85F/スモーク85F/フォレスト85F エクストラファイン不可 見本色不可
----	---

外径指定、厚み指定、プリズム加工等の特注加工はお受けできません。

■製作度数範囲表

乱視(-)												球面(-)	度数					
4.00	75	50	25	00	3.75	50	25	00	2.50	75	50			25	00	1.25	75	50
													0.00					
													25					
													50					
													75					
													1.00					
													25					
													50					
													75					
													2.00					
													25					
													50					
													75					
													3.00					
													25					
													50					
													75					
													4.00					
													25					
													50					
													75					
													5.00					
													25					
													50					
													75					
													6.00					
													25					
													50					
													75					
													7.00					
													25					
													50					
													75					
													8.00					
													25					
													50					
													75					
													9.00					
													25					
													50					
													75					
													10.00					
													50					
													11.00					
													50					
													12.00					
													50					
													13.00					
													50					
													14.00					
													50					
													15.00					

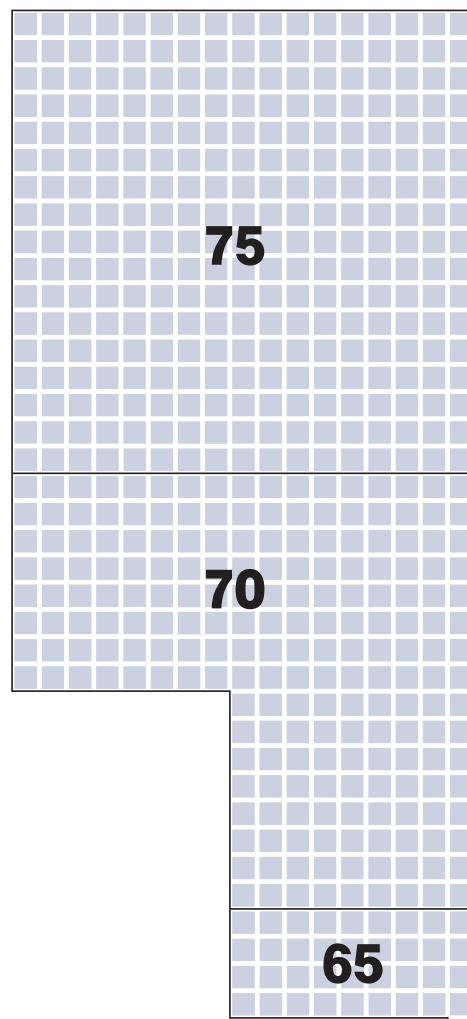

在庫度数範囲